




# Technical Data Sheet

## IG10Id

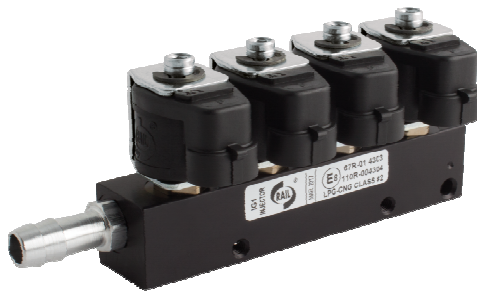

Scan to visit our website

Component classification as  
**67R-01 and 110R-00**  
Certified  
**ISO 15500-7:2015**

Characteristic	Unit	Value		Note
Injector version	n° of cylinders	2, 3, 4		
Material body and treatment		Aluminium black anodized		
Relative pressure	Bar (Psi)	From 0,5 to 2,0 (7 to 29)		Working pressure
		3,0 (43)		Max pressure
Rated voltage (at coil)	Volt	10,8 - 14,4		
Minimum copper wire section for coil connection	mm <sup>2</sup>	0,75		
Coil type	by encoding	A2	A3	
Resistance	Ω	2	3	± 5% at T= 25°
Suggested peak current time (duration)	ms	4,2	4,5	
Suggested peak current value	A			
Suggested holding current (±10%)	A	1		
Cold Starting Requirements		Increase up to 20% the "peak current time" for first cycles when gas temperature is < 10°C		
Complete OPENING response time	ms	2,8	3,2	(±10% - total injection time 5 ms) ± 5% tested without nozzle at 14V Δp=1bar T= 25°C tested with 2 mm nozzle diameter at 14V Δp=1bar T= 25°C
Complete CLOSING response time	ms	2,8	2,8	
Minimum injection pulse	ms	2,8	3,2	
Stroke	Micron	600		1,7 A supply current
Seat Diameter	mm	3,3		
Static flow rate (with max nozzle Φ) for 1 single injector at 20°C (with air)	SLPM (sL/min)	132		at 1 bar inlet pressure
Calculated max flow rate(with max nozzle Φ) for 1 single injector CNG at 20°C (G20 CNG fluid)	gr/sec	1,97		at 1 bar inlet pressure
	Kg/h	7,11		at 1 bar inlet pressure
Calculated max flow rate(with max nozzle Φ) for 1 single injector LPG at 20°C	gr/sec	3,5		at 1 bar inlet pressure
	Kg/h	12,62		at 1 bar inlet pressure
Leakage (tested with air)	cc/h	≤ 15		
Noise level	dB	64		±1 dB Rail test condition
Compatibility with gas		LPG, CNG		
Driver Stage		Peak and Hold (PWM)		
Coil Connector type		2 way Amp/Delphi super seal female connector with tab contacts		About connecting wire, refer to our drawing, code 114.01.AMP.001
Inlet gas fitting for rubber hose	mm	Ø10 mm / Ø12 mm / Ø14 mm / Ø16 mm		
Outlet gas fitting		Calibrated nozzles M8x1 for rubber hose Ø4 mm - Ø5 mm - Ø6 mm		
Calibrated hole ø range (for nozzles)	Ø	From 1,00 to 3,25 mm (0,25 mm step)		
Approvals		110R-00 / 67R-01 / ISO 15500-7:2015		
Operating ambient temperature range	°C	-40°C / +120°C		
Principle of operation		Solenoid valve - Normally closed - Mobile plunger		
Power handling capability LPG	HP/Cyl	1 bar up to 45 HP/cyl		
Power handling capability CNG	HP/Cyl	2 bar up to 40 HP/cyl		
Coil IP Rating		IP67		

**Ecomotive Solutions srl**



**Local Unit of :** Via A. Grandi, 16 - 42030 Vezzano Sul Crostolo (RE) Reggio Emilia - Italy  
**Email** info@railgroup.it **Tel** +39 0522 603801

**Last update:**

06/06/2024