



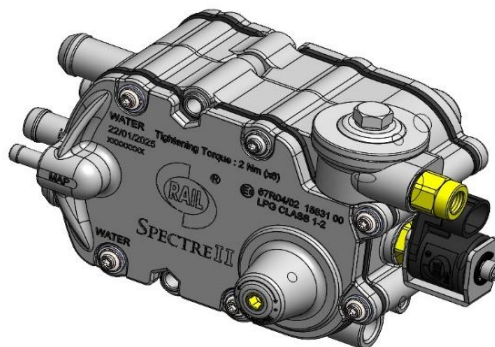

Scan to visit our website

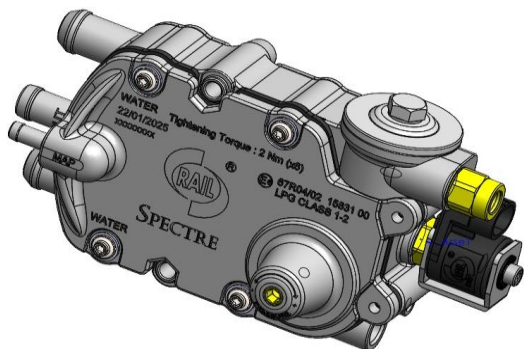

Technical Data Sheet

LPG Reducer Spectre and Spectre II

| Characteristic | Unit | Spectre | Spectre II |
|--------------------------------------|---------------------|-------------------------------------|---------------------------|
| Type | | One stage with diaphragm | |
| Material body and treatment | | Die-cast Aluminium | |
| Filter paper element surface | | 7600 | |
| Minimum pore size | µm-micron | 30 | |
| Dimension | mm | 74x108x200 | 129x108x200 |
| Weight | Kg | 1,1 | 1,7 |
| Service inlet pressure | | From 4 to 28 bar | |
| Outlet relative pressure | Bar | from 0.9 to 1.6 | from 1.4 to 1.9 |
| Max power | KW | 150 | 250 |
| Max Allowed LPG Leakage | Ncm ³ /h | 15 | |
| Gas inlet connection | | Pipe Ø 6mm -Thread M10x1 | Pipe Ø 8mm - Thread M12x1 |
| Outlet Fitting | mm | Ø12 | |
| Map Fitting | mm | Ø 6 | |
| Heating Fluid Circuit connection | mm | Ø 16 | |
| Operating Temperature | °C | - 20 to +120 | |
| Approvals | | ECE 67R-01 | |
| Burst Pressure | Bar | >68 | |
| Solenoid Valve Electrical connection | | Electrical connector: AMP Superseal | |
| Solenoid Valve Coil voltage | V D.C. | 12 or 24 | |
| Solenoid Valve Coil Power | W | 11 | |

Ecomotive Solutions srl

Local Unit of : Via A. Grandi, 16 - 42030 Vezzano Sul Crostolo (RE) Reggio Emilia - Italy
Email info@railgroup.it Tel +39 0522 603801



Last update:

10/04/2025